



LED CANOPY LIGHT

ID SERIES



www.solarmaxled.com
led@solarmaxtech.com
T: 951-300-0788 ■ F: 909-595-7388
3080 12th St., Riverside, CA 92507

© SolarMax LED, Inc. 2022. All rights reserved.
Spec Sheet is subject to change without notice.
Rev. date: 2023-12-07

Project Name:

Project Number:

Note:

Date:

ID SERIES LED CANOPY LIGHTING

Project Name:

40 WiDA - 60 WiDA

150W - 320W MH EQUIVALENT

Date:

Project Number:

Note:

Features

APPLICATION

Parking Garage, Drive-Through, Exterior Canopies, Surface-Mount Applications

OPTICS

Type V Distribution
CCT 3000K, 4000K, 5000K
CRI: 80

HOUSING

IP 65 rating

ELECTRICAL

120-277VAC
Standard 0-10V Dimmable Driver
Power Factor > 90%
THD < 20%

MOUNTING

Quick Installation Through Mounting Plate or Pendant Mount


OPERATIONAL TEMPERATURE

Ambient temperature range: -40°F to +122°F

WARRANTY

Standard 5-year warranty
Optional 10-year warranty

Product Dimensions

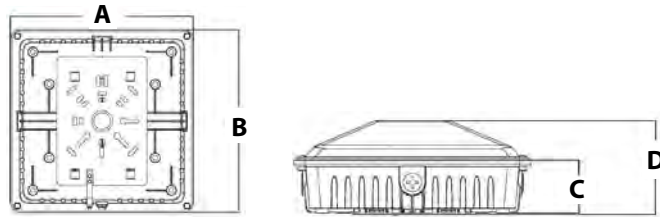

	40W - 60W
A	10.2"
B	10.2"
C	2.3"
D	4"
Net Weight	6.6 lbs

Top view



Bottom view



Side view



ID SERIES LED CANOPY LIGHTING

Project Name:

40 WiDA - 60 WiDA **150W - 320W MH EQUIVALENT**


Date:

Project Number:

Note:

Ordering Information

EXAMPLE: 40WiDA-00-3080



Model	Type of Sensor	CCT and CRI
40 WiDA 40W 60 WiDA 60W	00 Without Sensor PH Photocell SN Motion Sensor Up to 40'	3080 3000K 80 CRI 4080 4000K 80 CRI 5080 5000K 80 CRI

Technical Specifications

Model	Watts	Equivalence	Lumen Output		
			3000K	4000K	5000K
40 WiDA	40W	150W/ 170W MH	5,015 lm	5,343 lm	5,414 lm
60 WiDA	60W	250W/ 320W MH	6,858 lm	7,803 lm	7,558 lm

Mounting




SURFACE MOUNT
Mounting Plate *included*



PENDANT MOUNT
3/4" NPT Threaded Pipe *not included*

Photometrics



The plot is in units of mounting height of 10'.

Black 0.1 fc
 Green 0.5 fc
 Blue 1 fc